



Thinvent Uno 21.5" All in One PC

Intel Core i5-1335U processor

10 core, up to 4.6 GHz, 12 MB cache

16GB DDR4 RAM (2 x 8GB)

512GB SSD

Dual Band WiFi

DOS

Fixed Stand

SKU: UNO22-I5_13-8_8-M512-12_7-M-DOS-F



Thinvent Uno: Your Space-Saving Powerhouse for Seamless Productivity

Unleash efficiency with the Thinvent® Uno 21.5" All in One PC, engineered for performance and sleek aesthetics. Experience lightning-fast responsiveness and effortless multitasking, powered by the Intel® Core™ i5-1335U processor featuring 10 cores, bursting up to 4.6 GHz, backed by a generous 12 MB cache. With 16GB DDR4 RAM, you'll glide through demanding applications and switch tasks without a hitch. Its 128GB SSD ensures rapid boot times and quick application launches.

Visual Excellence

Immerse yourself in stunning Full HD visuals on the vibrant 21.5-inch display, boasting a crisp 1920 × 1080 resolution. Enjoy brilliant clarity with 250 nits brightness and a super-wide 178° viewing angle horizontally and vertically, perfect for collaborative work or solo viewing. Stay connected with the privacy-friendly pop-up 2 Megapixel camera for crystal-clear video calls.

Seamless Connectivity

Connect with ease using a full suite of ports and wireless options.


- 2x USB 3.2 ports
- 4x USB 2.0 ports (2 rear, 2 side)
- HDMI and VGA outputs for extended displays
- Gigabit Ethernet (1000 Mbps) for ultra-fast wired networking
- Dual Band Wi-Fi 5 (802.11ac) for reliable wireless access

Audio and Security

Enjoy integrated audio with 2 × 3 Watts speakers, plus dedicated speaker out and mic in jacks. Your data is secure with the built-in Kensington Lock.

Smart Design and Reliability

Crafted with a durable aluminium alloy, steel, and ABS plastic housing in sleek black, its fixed stand and slim 490mm × 378mm × 55mm profile minimize clutter. The energy-efficient 12V 7A adapter ensures stable power, drawing from a wide 100~275 Volts AC input. It arrives with FreeDOS, offering the flexibility to install your preferred operating system. Backed by RoHS, ISO, and BIS certifications, the Thinvent Uno is built for lasting quality and peace of mind.

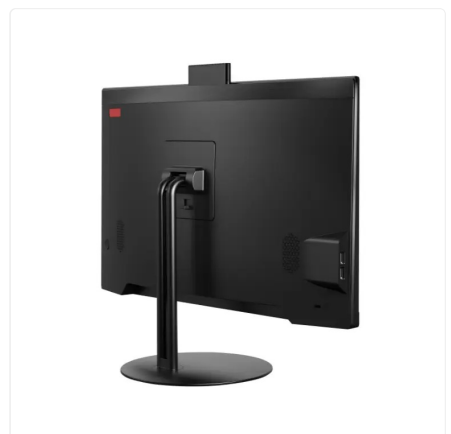

Thinvent Uno 21.5" All in One PC



Specifications

PROCESSING

Generation	13th
Series	i5
Processor Brand	Intel
Processor Model	1335U
Cores	10
Max Frequency	4.6 GHz
Cache	12 MB
Main Memory	16 GB
SSD Storage	512 GB

DISPLAY

Screen Size	21.5 inch
Resolution	1920 × 1080
Brightness	250 nits
Viewing Angle	Horizontal 178°, Vertical 178°
Camera	Pop up, 2 Megapixel
HDMI	1
VGA	1

AUDIO

Speakers	2 × 3 Watts
Speaker Out	1
Mic In	1

CONNECTIVITY

USB 3.2	2
USB 2.0	2
Side USB 2.0	2

NETWORKING

Ethernet	1000 Mbps
Wireless Networking	Wi-Fi 5 (802.11ac), dual band

POWER

DC Voltage	12 Volts
DC Current	7 Amps
Power Input	100~275 Volts AC, 50~60 Hz, 1.5 Amps maximum
Cable Length	2 Metre

ENVIRONMENTAL

Operating Temperature	0°C ~ 35°C
Operating Humidity	20% ~ 80% RH, non condensing
Certifications	BIS, RoHS, ISO

PHYSICAL

Form Factor	All-in-One
Stand	Fixed
Dimensions	490mm × 378mm × 55mm
Housing Material	Aluminium alloy, steel and ABS Plastic
Housing Colour	Black
Kensington Lock	Yes
Net and Gross Weight	8.02kg, 8.02kg

OPERATING SYSTEM

Operating System	FreeDOS
------------------	---------



Thinvent Uno 21.5" All in One PC

Ordering Information

PRODUCT CODE

Uno22-i5_13-[RAM]-[SSD]-12_10-[Wireless]-[OS]-[Accessories]

RAM

4 = 4GB DDR4

8 = 8GB DDR4

16 = 16GB DDR4

32 = 32GB DDR4

32_32 = 64GB
DDR4 RAM (2 x
32GB)

16_16 = 32GB
DDR4 RAM (2 x
16GB)

8_8 = 16GB DDR4
RAM (2 x 8GB)

SSD

m128 = 128GB

m256 = 256GB

m512 = 512GB

m1024 = 1TB

Wireless

m = Dual Band WiFi

X = No WiFi

OS

DOS = DOS

W_OS = Without OS

11V = Windows 11 IoT Value

11P = Windows 11 Pro

Thinix = Thinix™ Embedded Linux

U = Ubuntu Linux

Accessories

F = Fixed Stand

HA = Height Adjustable Stand

www.thinvent.in

sales@thinvent.in

+91-11-430-77467

 +91-99903-44251

R&D and Manufacturing

#11 Sports Complex

Salvador Do Mundo

North Goa - 403101, India

Sales

UGF-10-A Omaxe Gurgaon Mall

Sector 49, Sohna Road

Gurgaon - 122018, India

